

# SY-400/A

## Access Controller



The SY-400/A is an access controller for control of up to two doors, gates or other barriers. The SY-400/A is a part of a complete access control solution. All programming and monitoring functions must be done via PC with Falcon software. The SY-400/A can also operate as time & attendance terminal with TimeLOG PRO.

Two separate readers may be connected. Each badge reader may be used to open and record the use of a different entrance door, or both may be connected to different sides of the same door for independent control over entrances and exits.

Various readers can be connected to the SY-400/A, and they are adjusted to badges used by the client. Further, an optional PPrintX unit can be connected for biometric validation purposes. Two separate sensors may be connected to verify passage and door closure, or to serve other purposes.

Some of the SY-400/A's most special features include:

**Reliability** - performance of local checks should a communication failure occur

**Large storage capacity** - 512 Kbytes

**Dynamic memory management** - between transactions and permitted list



# SY-400/A

## Access Controller

SY-400/A design particularly emphasizes on external devices fast-connection, such as readers, I/O, communication. This mode of connection without product disassembly is provided for quick and simple maintenance purposes.

### Technical Specifications

- A direct connection of 2 readers: PRX-3A, PRX-30, SY-10, SY-1 and other existing readers
- Verification by finger print - PPrintX
- 3 operation methods: card only, card & PIN, card & finger print
- Up to 30,000 permitted cards
- Up to 20,000 transactions
- Up to 2 doors control
- Door control sensor
- Time zone by type of day (working day, holiday, etc.)
- Calendar support
- Two methods of a validity check: local - independent of communication on-line - by SY-Server
- Communication - RS 232/485, modem, TCP/IP

### Physical Characteristics

- Dimensions: Height: 11.0 cm  
Width: 23.4 cm  
Depth: 3.4 cm
- Power requirements: Voltage: 115/230 VAC

### Complementary Devices

Product	Description	Quantity	Catalog No.
Programming panel	Set-up purposes only	1	770730
PPrintX	Fingerprint reader	1	1000400
I/O 4x4*	I/O Extension (N/A)	1	60430000
Readers	Designed for <u>only</u> two readers		
PRX-30	Proximity reader	2	60270004
SY-1	Magnetic reader	2	360055
SY-10/B	Barcode reader, connection up to 300m	2	01000102
SY-10/M	Magnetic reader, connection up to 300m	2	01000101
Reader unit	Reader barcode unit	2	60250000
Reader unit	Reader magnetic unit	2	60250200


\* to be released Q3 2002

### Options

- Internal modem
- Net connection (Ethernet)
  - flexible, well-developed IP protocol stack
  - Ethernet (10 BASE-T or AUI)
  - Telnet and SNMP management

### Advantages

- Reliability - local checks in case of communication failure
- Large storage capacity 512 K Bytes
- Dynamic memory management between transactions and permitted list
- Cost-effective solution for small systems with few readers
- TCP/IP connection

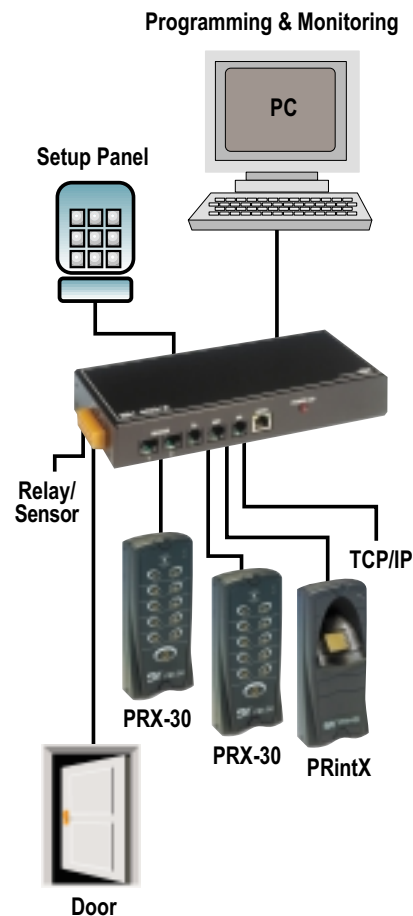

Synel Industries Ltd.  
Yokneam Industrial Park, POB 142, Yokneam 20692, Israel  
Tel: +972-4-9596760 Fax: +972-4-9590729  
e-mail: info@synel.co.il  
site: www.synel-ind.com

Pictures in this brochure are for illustration purposes only.  
The technical data sheet packed with the product is the only obligatory source of technical information

Synel Industries Ltd. **SY**